



Data Sheet

ComPAC

DC-DC Switchers

50 to 600 Watts

1 to 3 outputs



Features

- RoHS Compliant (VE versions)
- Inputs 24, 48, and 300 Vdc
- Any output: 1 to 95 Vdc
- Input surge withstand:
British Telecom BTR 2511,
EN-61000-4-5
- Meets British Telecom BTR 2511,
EN55022 Class B conducted
emissions
- cULus, cTUVus (60950-1)
- CE marked
- 80 – 90% efficiency
- Up to 10 W/cubic inch
- Reverse polarity protected
- Master disable
- Overvoltage shutdown

Product Highlights

ComPAC delivers up to 600 W from one, two, or three outputs in a package just 0.99" (25,2 mm) in height with the field proven performance, high efficiency and high reliability inherent in Vicor's component level power converters. ComPAC meets British Telecom and European norms for input surge withstand and meets conducted emissions of EN55022 Class B. ComPAC is offered with input voltage ranges optimized for industrial and telecommunication applications and provides extended input overvoltage capability, input reverse polarity protection, undervoltage lockout, and master disable.

Packaging Options

Conduction Cooled Models Available Add "-CC" to the end of the part number. (Consult factory for details.)
Extended heat sink available add "-H1" to end of part number.

ComPAC Configuration Chart

Substitute VE- for VI- for RoHS compliant versions			
Configuration	Output Power	# of Modules	Dimensions
Single Output			
VI-LC	50 – 200 W	1	8.6" x 2.5" x 0.99" (218,4 x 63,5 x 25,2 mm)
VI-MC	100 – 400 W	2	8.6" x 4.9" x 0.99" (218,4 x 124,5 x 25,2 mm)
VI-NC	300 – 600 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)
Dual Output			
VI-PC	100 – 400 W	2	8.6" x 4.9" x 0.99" (218,4 x 124,5 x 25,2 mm)
VI-QC	150 – 600 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)
Triple Output			
VI-RC	150 – 600 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)

• Input Voltage

Nominal	Input Range Full Power	Maximum Power ^a	Low Line 75% Max. Power	Transient ^b
1 = 24 V	21 – 32 V	(1)	18	36
W = 24 V	18 – 36 V	(1)	n/a	n/a
3 = 48 V	42 – 60 V	(2)	41	72
N = 48 V	36 – 76 V	(2)	n/a	n/a
6 = 300 V	200 – 400 V	(2)	188	425

^a Max. Output Per Module	5 V Outputs	>5 V Outputs	<5 V Outputs
(1)	150 W	150 W	30 A
(2)	200 W	200 W	40 A

^b Transient voltage for one second

• Output Voltage

Z = 2 V	2 = 15 V
Y = 3.3 V	N = 18.5 V
O = 5 V	3 = 24 V
X = 5.2 V	L = 28 V
W = 5.5 V	J = 36 V
V = 5.8 V	K = 40 V
T = 6.5 V	4 = 48 V
R = 7.5 V	H = 52 V
M = 10 V	F = 72 V
1 = 12 V	D = 85 V
P = 13.8 V	B = 95 V

• Product Grade Temps. °C

Grade	Operating	Storage
E =	-10 to +85	-20 to +100
C =	-25 to +85	-40 to +100
I =	-40 to +85	-55 to +100
M =	-55 to +85	-65 to +100

Temperatures apply to product case.

• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
Y = 50 W	Y = 10 A
X = 75 W	X = 15 A
W = 100 W	W = 20 A
V = 150 W	V = 30 A
U = 200 W	U = 40 A

• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
W = 100 W	W = 20 A
V = 150 W	V = 30 A
U = 200 W	U = 40 A
S = 300 W	S = 60 A
Q = 400 W	Q = 80 A

• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
S = 300 W	S = 60 A
P = 450 W	P = 90 A
M = 600 W	M = 120 A

COMPAC SPECIFICATIONS

(typical at $T_{BP} = 25^{\circ}\text{C}$, nominal line and 75% load, unless otherwise specified, V_{NOM} is factory set output voltage and I_{NOM} is maximum rated output current.)

INPUT SPECIFICATIONS

Parameter	E-Grade			C-, I-, M-Grade			Unit	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
24 V	21	24	32	21	24	32	Vdc	See Fusing Information on Page 3
24 V Wide	18	24	36	18	24	36	Vdc	
48 V	42	48	60	42	48	60	Vdc	
48 V Wide	36	48	76	36	48	76	Vdc	
300 V	200	300	400	200	300	400	Vdc	
No load power dissipation ^a	1.35		2	1.35		2	Watts	
Master disable input current ^a (Absolute max., 20 mA)	4			4			mA	Sink or source to disable optocoupler (See Section 18 CompPAC Technical Description in VI-200/VI-J00 Applications Manual)
Quiescent Input current logic disable ^a		7	10		7	10	mA	Current drawn from source when disabled
Reverse polarity protection								No damage to unit with external fuse

^a For MC, PC series, multiply value by 2; for NC, QC, RC series, multiply value by 3.

OUTPUT SPECIFICATIONS (Applies to each output individually)

Parameter	E-Grade			C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Set point accuracy		1%	2%		0.5%	1%	V_{NOM}	
Load / line regulation			0.5%		0.05%	0.2%	V_{NOM}	LL to HL, 10% to full load
Load / line regulation			1%		0.2%	0.5%	V_{NOM}	LL to HL, no load to full load
Output temperature drift		0.02			0.01	0.02	$\%/^{\circ}\text{C}$	Over rated temperature range
Long term drift		0.02			0.02		$\%/1\text{ k hrs.}$	
Output ripple								
2 V, 3.3 V			150		60	100	mVp-p	20 MHz bandwidth
5 V			250		100	150	mVp-p	20 MHz bandwidth
10 – 48 V			3%		0.75%	1.5%	V_{NOMP-p}	20 MHz bandwidth
Output voltage trimming ^a	50%		110%	50%		110%	V_{NOM}	
Total remote sense compensation ^a	0.5			0.5			Volts	0.25 V maximum allowable drop in –Out lead
OVP set point		125%		115%	125%	135%	V_{NOM}	Recycle power to restart
Current limit	105%		135%	105%		125%	I_{NOM}	Automatic restart
Short circuit current ^b	20%		140%	20%		130%	I_{NOM}	

^a 10 V, 12 V and 15 V outputs, trim range $\pm 10\%$. Consult factory for wider trim range.

^b Output voltages of 5 V or less incorporate foldback current limiting, outputs greater than 5 V incorporate straight line current limiting.

CONFIGURABLE SPECIFICATIONS (Cont.)

■ THERMAL CHARACTERISTICS

Parameter	E-Grade			C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Efficiency	78 – 88%			80 – 90%				for 5 V outputs and higher
Shut down temp. — case ^a	90	95	105	90	95	105	°C	Cool and recycle power to restart
Operating temp. — case	85			85			°C	See Thermal Curves

^a Shut down temperature threshold is above maximum operating temperature. For over temperature protection, external means of disable should be employed below maximum operating temperature.

■ ISOLATION CHARACTERISTICS

Parameter	E-Grade			C-, I-, M-Grade			Unit	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Isolation								
Input to output	4,242			4,242			Vdc	
Output to case	707			707			Vdc	
Input to case	2,121			2,121			Vdc	

■ MECHANICAL SPECIFICATIONS

Parameter	E-Grade			C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Weight ^a	19.2			19.2			Ounces	
	544			544			Grams	

^a For MC, PC series, multiply value by 2; for NC, QC, RC series, multiply value by 3.

■ FUSING INFORMATION

Input Voltage	24 V	48 V	300 V
LC series (200 W)	10 A	7 A	2 A
MC, PC series (400 W)	20 A	15 A	4 A
NC, QC, RC series (600 W)	35 A	25 A	6 A

CONFIGURABLE SPECIFICATIONS (Cont.)

■ AGENCY APPROVALS

Safety Standards	Markings	Notes
UL1604 UL / CSA / EN / IEC 60950-1	cULus, cTUVus, CE Marked	Low Voltage Directive


■ EMI/EMC Characteristics (Performed on selected samples representative of the ComPac product family.)

Parameter	Notes
Input surge withstand IEC 61000-4-5 level 2	(Up to 200 mS, $Z_S = .5 \Omega$, no interruption of performance, see: Long Term Safe Operating Area Curves, pg 6)
Conducted Emissions British Telecom BTR 2511, Issue 2 EN 55022, class B	
ESD IEC 61000-4-2 level 4	


THERMAL CURVES

■ FREE AIR
 □ 50 LFM
 ◆ 100 LFM
 ◇ 250 LFM
 ▲ 500 LFM
 △ 750 LFM
 ● 1000 LFM


2 V to 7.5 V Output, Standard heat sink

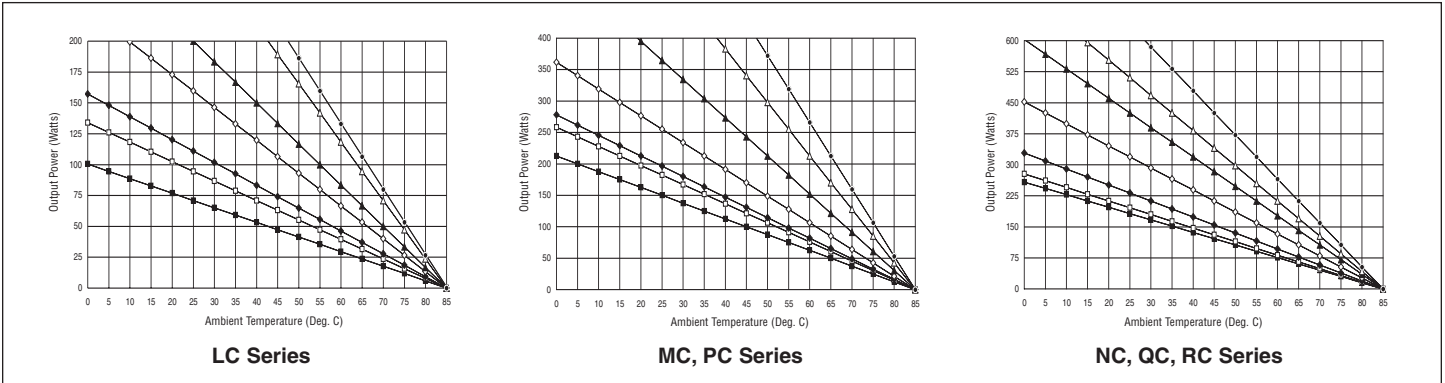


10 V to 95 V Output, Standard heat sink

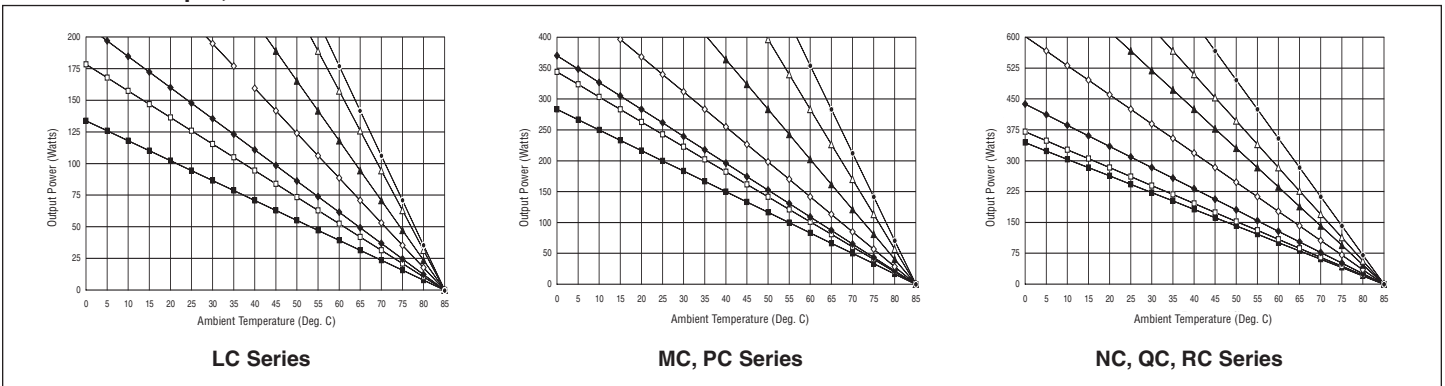

2 V to 7.5 V Output, H1 heat sink

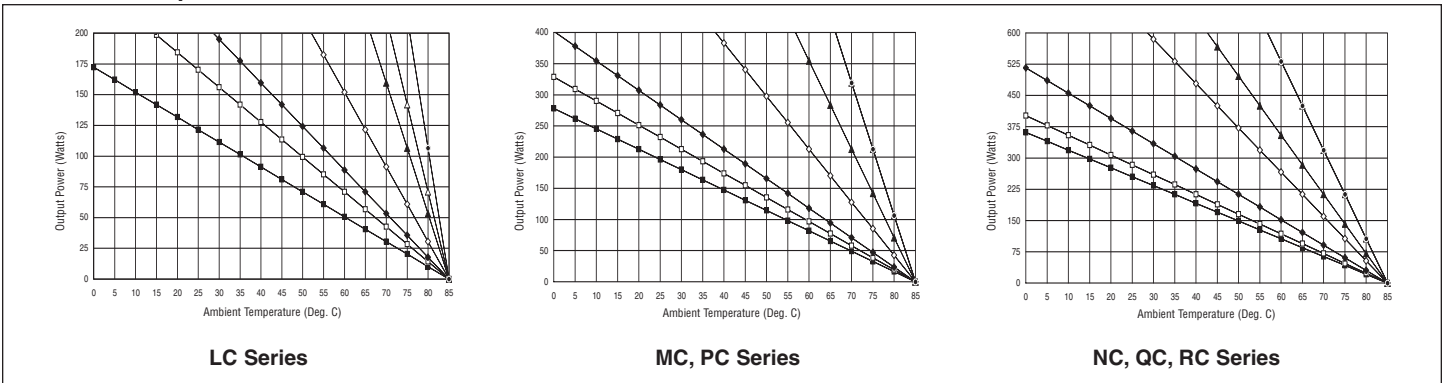


10 V to 95 V Output, H1 heat sink

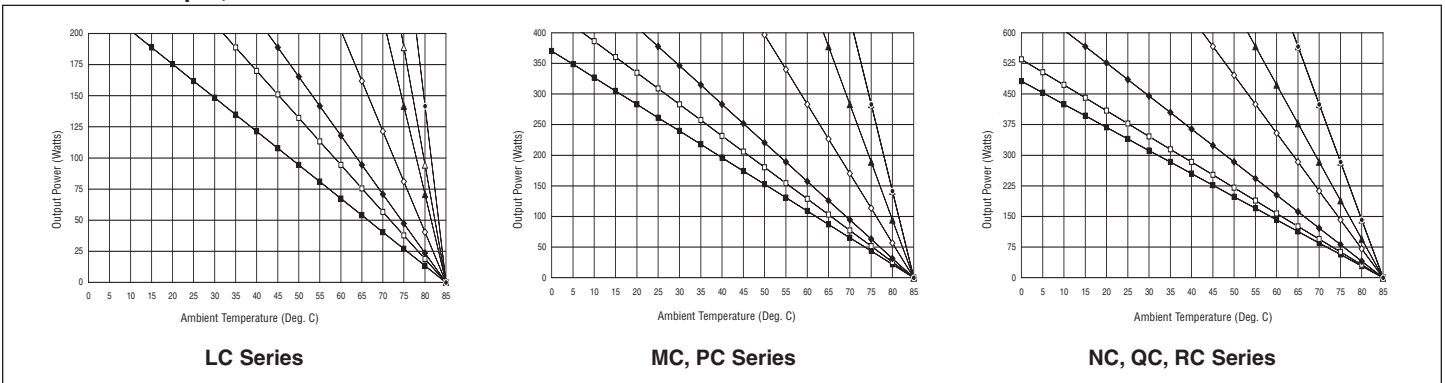

ALL MODELS


INPUTS	
1	Ground
2	-Input
3	+Input
4	Disable-
5	Disable+
OUTPUTS	
A	+Output
B	+Sense
C	Trim
D	-Sense
E	-Output

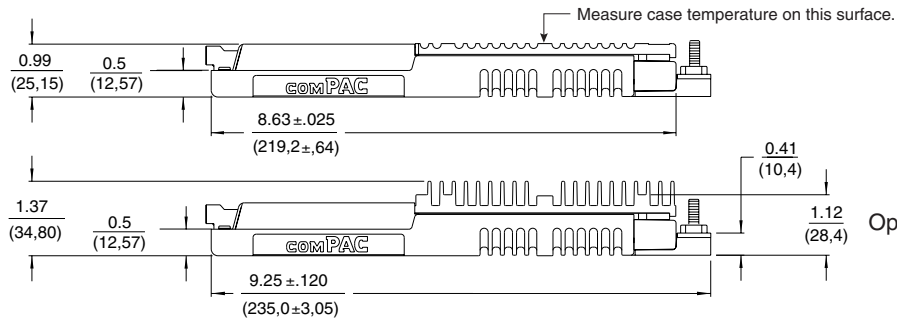


Standard Heat sink

Optional heat sink (H1)


LC SERIES

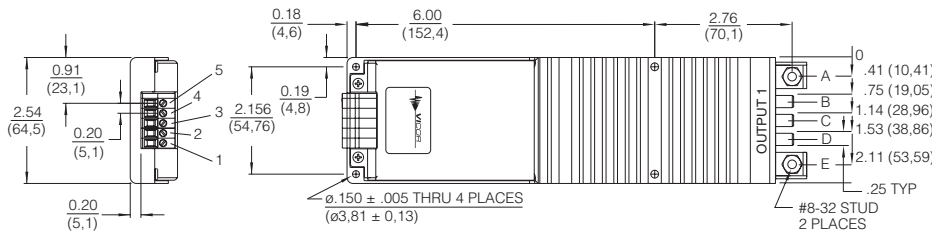

MC, PC SERIES

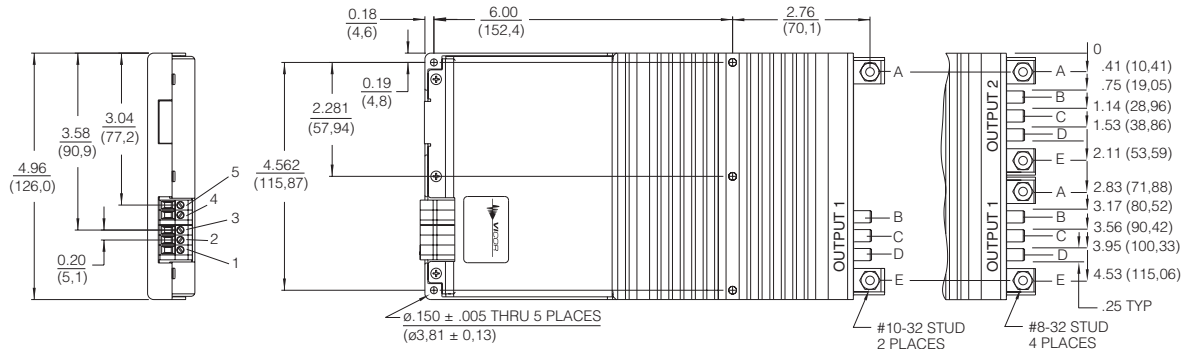


NC, QC, RC Series

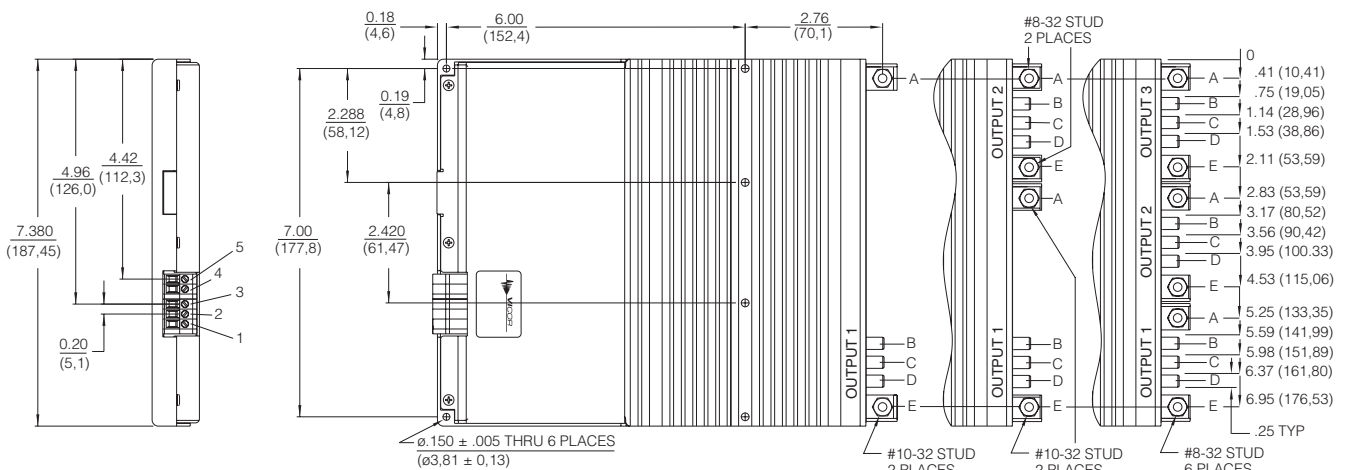

LONG TERM SAFE OPERATING AREA CURVES

(1% duty cycle max., $Z_s = .5\Omega$, for short duration transient capability refer to specifications)

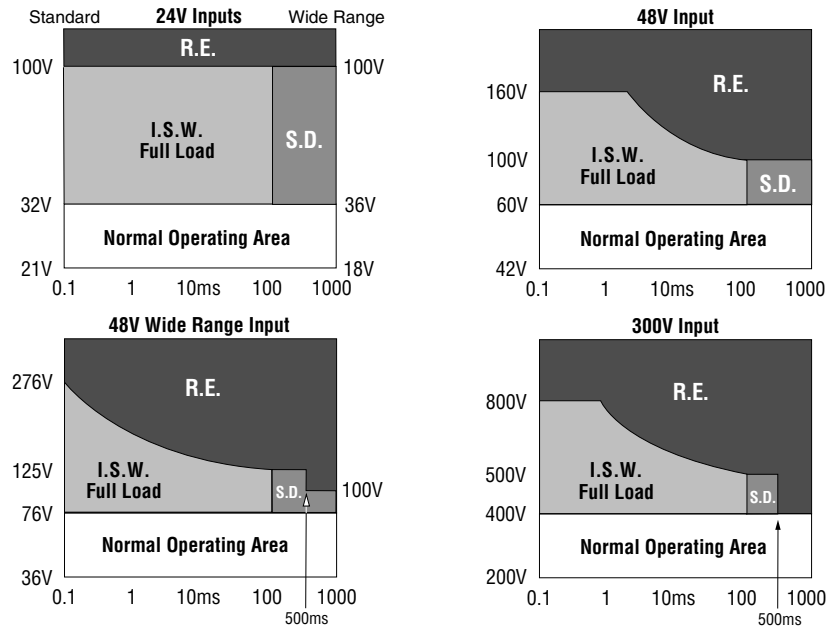

I.S.W.: Input surge withstand, no degradation of performance. **R.E.:** Ratings Exceeded **S.D.:** Shutdown

Warranty

Vicor products are guaranteed for two years from date of shipment against defects in material or workmanship when in normal use and service. This warranty does not extend to products subjected to misuse, accident, or improper application or maintenance. Vicor shall not be liable for collateral or consequential damage. This warranty is extended to the original purchaser only.

EXCEPT FOR THE FOREGOING EXPRESS WARRANTY, VICOR MAKES NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Vicor will repair or replace defective products in accordance with its own best judgement. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

Information published by Vicor has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Vicor reserves the right to make changes to any products without further notice to improve reliability, function, or design. Vicor does not assume any liability arising out of the application or use of any product or circuit; neither does it convey any license under its patent rights nor the rights of others. Vicor general policy does not recommend the use of its components in life support applications wherein a failure or malfunction may directly threaten life or injury. Per Vicor Terms and Conditions of Sale, the user of Vicor components in life support applications assumes all risks of such use and indemnifies Vicor against all damages.

Vicor s comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor components are not designed to be used in applications, such as life support systems, wherein a failure or malfunction could result in injury or death. All sales are subject to Vicor's Terms and Conditions of Sale, which are available upon request.

Specifications are subject to change without notice.

Intellectual Property Notice

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. Interested parties should contact Vicor's Intellectual Property Department.

Vicor Corporation
25 Frontage Road
Andover, MA, USA 01810
Tel: 800-735-6200
Fax: 978-475-6715

email

Customer Service: custserv@vicorpower.com
Technical Support: apps@vicorpower.com